


- **HS No.:** 3812 20 90
- **Appearance:** Blendcat PMDETA 20 is a clear, colorless or slightly yellowish flammable mixture of PMDETA and DEG in the ratio 20:80.

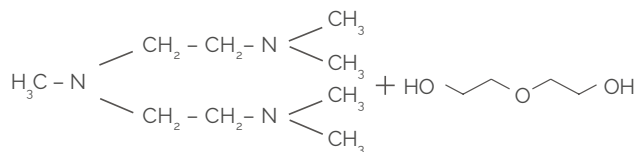

SPECIFICATIONS

Parameter	Ingredient 1	Ingredient 2
Chemical name:	N,N-Bis(2-dimethylaminoethyl)methylamine	2,2'-Oxydiethanol
Index number:	612-109-00-6	603-140-00-6
EC number:	221-201-1	203-872-2
CAS number:	3030-47-5	111-46-6
Substance content (% wt.):	maximum 20.00	maximum 80.0

GENERAL CHARACTERISTICS

Parameter	Unit	Requirements
Density at 21.5 °C	kg/m ³	1,055
Initial boiling point	°C	202
Flash point	°C	92
Melting point	°C	<10

APPLICATIONS AREA

Blendcat PMDETA 20 is used as a **catalyst in the production of polyurethane materials.**

SEGMENTS

- Polyurethane foam catalyst

SYNONYMS

Ongrocat 6903

HEALTH HAZARD EFFECTS

Harmful if swallowed, in contact with skin, or if inhaled. Causes severe skin burns and eye damage.

ADR REGULATIONS

UN 1760 CORROSIVE LIQUID, n.o.s.
(N,N-Bis(2-dimethylaminoethyl)methylamine, content 20 % wt.), 8, II, (E)

PACKAGING

Road tank cars
Drums (216 l) 215 kg net
IBC (1,000 l) 1,010 kg net